



2020 Catalogue

# Our Product Range

The JUTA brand itself is over 100 years old, and the organisation is one of the world's most respected manufacturers of geosynthetic materials. JUTA UK manufacturers from state of the art production facilities across Europe and beyond and has a proven track record of providing innovative solutions with a dynamic and ethical approach to our customers. We as a company stand for innovation, quality and service, a philosophy that is mirrored in all areas of our business, and more importantly our employees.

As manufacturers of multiple geosynthetic components our product range is extensive, which helps to provide our customers with a wide range of solution based systems. The best solution is always the most practical and cost-effective option, ensuring the most suitable and application specific products are used. With this ethos our approach is always to listen to the customer(s) and

offer the correct approach. If you feel first class service, premium products direct from source, and bespoke solutions are right for you; then feel free to contact the team at JUTA for a more in depth discussion. **We look forward to building a strong, longstanding and trustworthy relationship with you for today, and tomorrow.**



FIND OUT MORE ABOUT JUTA UK: [JUTA.CO.UK](http://JUTA.CO.UK)



Alex Lowes, Kawasaki Racing Team, WSB, 2020 - Official Partner of JUTA UK LTD

04	<b>GP<sup>®</sup> 1 System</b>
06	<b>GP<sup>®</sup> 2 System</b>
08	<b>GP<sup>®</sup> 4 System</b>
10	<b>GP<sup>®</sup> TitanFlex System</b>
12	<b>Structural Waterproofing System</b>
14	<b>Hydrolock System</b>
15	<b>Void Vent System</b>
16	<b>Containment Engineering</b>
17	<b>Civil Engineering</b>
18	<b>Attenuation &amp; SuDS</b>
20	<b>Agriculture</b>
21	<b>Artificial Grass</b>
22	<b>Easy-Trim Product Range</b>

**JUTA GP®1 Gas Barrier** is a multi-layer, proprietary gas resistant Damp Proof Membrane, reinforced with a polypropylene reinforcing grid with an integral aluminium foil. GP®1 is specifically designed and manufactured to perform as a Methane, Carbon Dioxide, Radon, Bulk Ground Gas, air & Moisture protection system.

**JUTA GP®1** can be used on any site where carbon dioxide, methane, bulk ground gas and/or radon is present up to and including BS8485:2015 + A1 2019 Characteristic situation (CS) 6. The barrier is sufficiently resistant to the ingress of harmful gases into a building. On more heavily contaminated sites, a passive or active venting system in addition to a gas barrier may be required to dilute the gases down to acceptable levels and specific design advice should be sought.



### System of Products

- GP®1 Membrane
- GP®1 SAM
- GeoNETEX 300 TT
- GP® DPC



#### Ideal for all common ground floor constructions, including:

- Reinforced cast in-situ (ground-supported) concrete floors.
- Suspended beam and block concrete floors.
- Pre-cast concrete slabs.
- Can also be used above or below the slab (not subject to hydrostatic pressure).

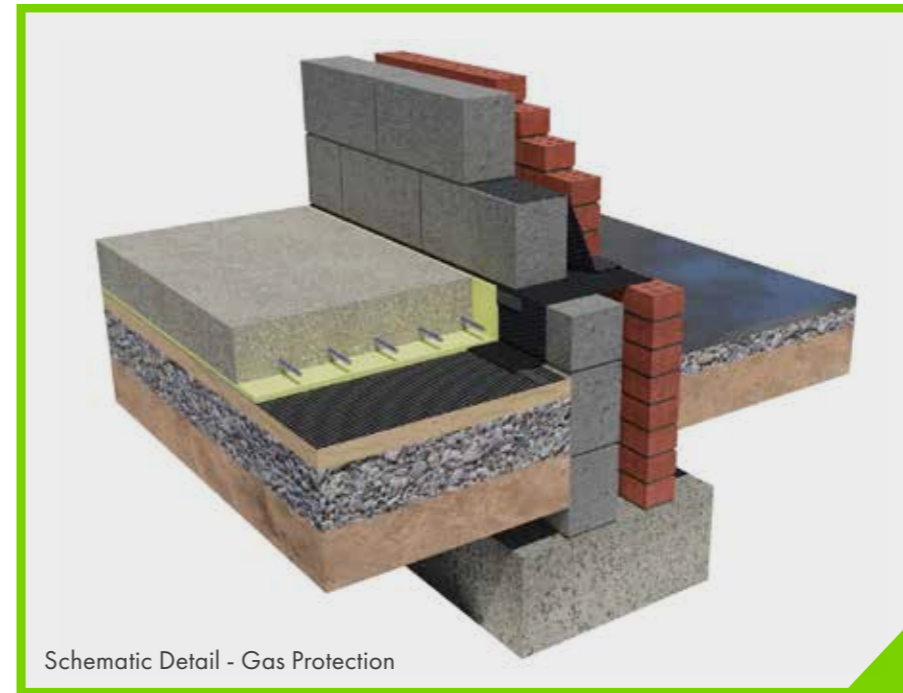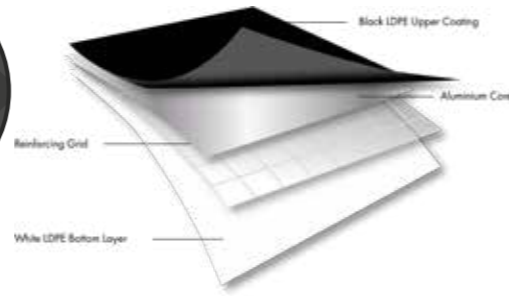

**JUTA GP®1 SAM (SELF-ADHESIVE MEMBRANE)** is a bituminous gas proof and waterproof sheet, composed of self-adhesive SBS polymer modified bitumen incorporating the GP®1 gas membrane, and a lower surface finish of siliconised paper released film.

#### GEONETEX 300 TT

300 TT Nonwoven geotextile manufactured from UV stabilised, high tenacity, virgin polypropylene fibers that have been mechanically entangled to provide high strength, high extensibility, high loft and excellent abrasion characteristics. 300TT is certified against a range of EN standards for separation, filtration & protection. 300TT protection geotextile is also a Class 3 Separator/Filter Geotextile to BS8661.

#### GAS RESISTANT JUTA GP® DPC

is a unique single layer, embossed high-performance DPC. GP® DPC is specifically designed and manufactured to perform as a methane, carbon dioxide, radon and moisture resistant damp proof course. GP® DPC complies with all the latest codes of practice as published by BRE, CIRIA & BSI.



Scan this QR code with your phone's camera to view our BBA certified products

“ Having worked closely with JUTA UK for many years they have helped us deliver our membrane systems. With a critical insight into our business, backed up by a powerful technical & customer support ethos they have ensured we are constantly dynamic and competitive in the marketplace.”  
- Simon Goodchild, UK Membranes



**NSAI**



riba  
product  
selector

premier  
guarantee





# GP<sup>®</sup> 2 System

**JUTA GP<sup>®</sup>2 Gas Barrier** is a multi-layer, low-density polyethylene membrane. Reinforced with a polypropylene reinforcing grid. GP<sup>®</sup>2 is specifically designed and manufactured to perform as a high performance damp proof membrane, Radon, air and moisture protection system, as well as low level protection to carbon dioxide and methane.

**JUTA GP<sup>®</sup>2** can be used on any site where low levels of ground gas is present. The barrier is sufficiently resistant to the ingress of Radon into a building. On more heavily contaminated sites a passive or active venting system may be required to dilute the gases down to acceptable levels and specific design advice should be sought.

**Ideal for all common ground floor constructions, including:**

- Reinforced cast in-situ (ground-supported) concrete floors.
- Suspended beam and block concrete floors.
- Pre-cast concrete slabs.
- Can also be used above or below the slab (not subject to hydrostatic pressure).

### System of Products

- GP<sup>®</sup>2 Membrane
- GP<sup>®</sup> Tape
- GP<sup>®</sup> Lap Tape
- GP<sup>®</sup> Radon DPC



### JUTA GP<sup>®</sup> TAPE

is an extruded butyl tape designed for jointing JUTA Gas Barriers. The GP<sup>®</sup> Tape is double sided, with release film on both sides to assist with ease of installation. GP<sup>®</sup> Tape is designed to prevent the passage of water, water vapour, air and gas, for use in building construction with damp proof membranes, vapour control layers and ground gas barriers.

### JUTA GP<sup>®</sup> LAP TAPE

is an adhesive aluminium foil tape, designed for sealing joints of JUTA Gas Barriers. GP<sup>®</sup> Lap Tape is single-sided, with release film on one side. GP<sup>®</sup> Lap Tape is designed to prevent the passage of water, water vapour, air and gas, for use in building construction with damp proof membranes, vapour control layers and ground gas barriers.

### GP<sup>®</sup> RADON DPC

is a unique-tri-polymer High Performance DPC. GP<sup>®</sup> Radon DPC is specifically designed and manufactured to perform as a Radon & Moisture resistance damp proof course. GP<sup>®</sup> Radon DPC complies with the latest codes of practice as published by BRE, CIRIA & BSI (BS EN 14909).


//

I only ever use JUTA products! They have the best performing products, at the best prices with phenomenal service across the board. A partnership we hope continues to prosper and grow."

- John McLoughlin - Dance Reeves



Scan this QR code with your phone's camera to view our BBA certified products

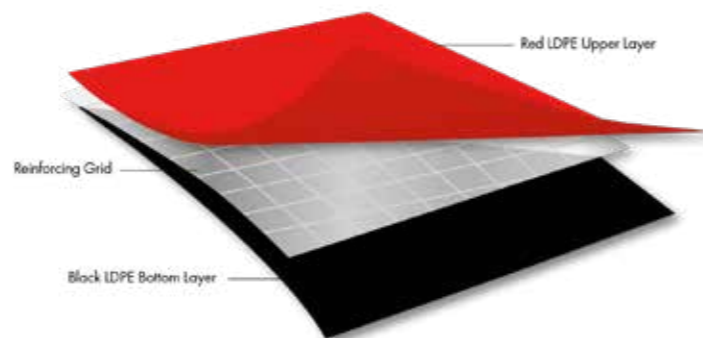

All data sheets can be downloaded at [juta.co.uk](http://juta.co.uk)



NSAI





# GP<sup>®</sup> 4 System

**JUTA GP<sup>®</sup>4** – BBA certified Radon Barrier is a multi-layer, low-density polyethylene membrane. Reinforced with a polypropylene reinforcing grid. GP<sup>®</sup>4 is specifically designed and manufactured as a high Performance Radon, air and moisture protection system, as well as low level protection to carbon dioxide and methane.

**JUTA GP<sup>®</sup>4** can be used on any site where Radon Gas is present. The barrier is sufficiently resistant to the ingress of Radon into a building. On more heavily contaminated sites a passive or active venting system may be required to dilute the gases down to acceptable levels and specific design advice should be sought.

**Ideal for all common ground floor constructions, including:**

- Reinforced cast in-situ (ground-supported) concrete floors.
- Suspended beam and block concrete floors.
- Pre-cast concrete slabs.
- Can also be used above or below the slab (not subject to hydrostatic pressure).

## System of Products

- GP<sup>®</sup>4 Membrane
- GP<sup>®</sup>1 SAM
- GeoNETEX 300 TT
- GP<sup>®</sup> Radon DPC
- GP<sup>®</sup> Tape
- GP<sup>®</sup> Lap Tape




Schematic Detail - Gas Protection

**JUTA GP<sup>®</sup>1 SAM (SELF-ADHESIVE MEMBRANE)** is a bituminous gas proof and waterproof sheet, composed of self-adhesive SBS polymer modified bitumen incorporating the GP<sup>®</sup>1 gas membrane, and a lower surface finish of siliconised paper released film.

**GEONETEX 300 TT**  
300 TT Nonwoven geotextile manufactured from UV stabilised, high tenacity, virgin polypropylene fibers that have been mechanically entangled to provide high strength, high extensibility, high loft and excellent abrasion characteristics. 300TT is certified against a range of EN standards for separation, filtration & protection.

**GP<sup>®</sup> RADON DPC**  
is a unique-tri-polymer High Performance DPC. GP<sup>®</sup> Radon DPC is specifically designed and manufactured to perform as a Radon & Moisture resistance damp proof course. GP<sup>®</sup> Radon DPC complies with the latest codes of practice as published by BRE, CIRIA & BSI (BS EN 14909).

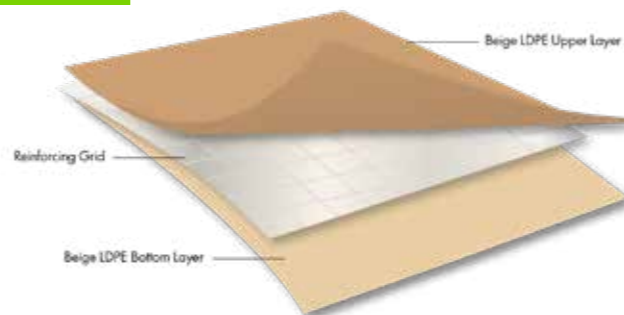

All data sheets can be downloaded at [juta.co.uk](http://juta.co.uk)



Scan this QR code with your phone's camera to view our BBA certified products



NSAI





# GP® TitanFlex System




GP® TITANFLEX – Gas and hydrocarbon barrier is a multi-layer, polyethylene membrane. GP® TITANFLEX is specifically designed, manufactured, tested and certified to perform as a methane, carbon dioxide, radon, ground gas, VOC, air & moisture and hydrocarbon protection system.

### GP® TITANTECH DPC

Gas and Hydrocarbon Resistant DPC is a unique single layer, embossed High-Performance DPC. GP® TITANTECH DPC is specifically designed and manufactured to perform as Methane, Carbon dioxide, VOC, Radon & Moisture resistant damp proof course. JUTA GP® TITANTECH DPC has an embossed surface to create superior mortar adhesion which is essential when being used in 3+ storey applications. JUTA GP® TITANTECH DPC is compliant to BS EN 14909:2012 and can be used in both vertical and horizontal applications.

### GP® VOID VENT & ACCESSORIES

GP® Void Vent is a cusped HDPE core with a geotextile filter/separator bonded to a single side, in either 25mm or 40mm depth. The intended use of the Void Vent is to provide a means of ventilation when used in conjunction with an approved Gas Protection Barrier, in accordance with the recommendation(s) contained within NHBC Guidance and BS8485:2015 + A1 2019. It is optimised for maximum strength and performance, providing high levels of air/gas flow.

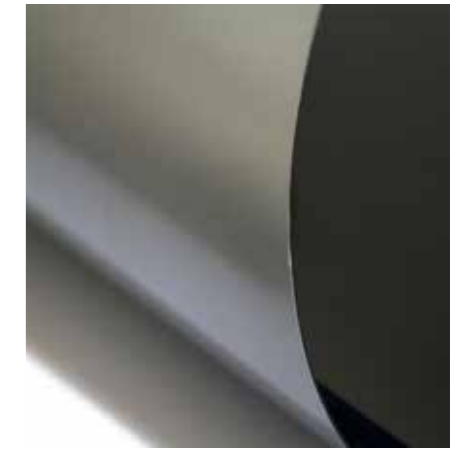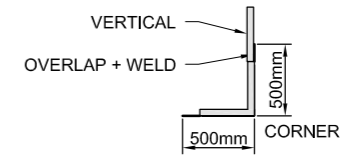

### GP® TITANFLEX PRE-FABRICATED UNITS

GP® Titanflex pre-fabricated units are high frequency welded units made from the component membrane element (GP® Titanflex) in a range of shapes and sizes. All units are made to order at bespoke sizes to suit individual project needs.

### Ideal for all common ground floor constructions, including:

- Internal & external corners (for above and below ground applications)
- Pipe penetration top hats
- Pile head collars



“ JUTA UK have never let us down – providing the best quality products and perfect service throughout. What’s not to like!?”  
- Gordon Cave, Doncaster Membrane Installations Limited.



Scan this QR code with your phone’s camera to view our BBA certified products

### System of Products

- GP® TitanFLEX
- GP® Pre Fab Unit
- GP® TitanTech DPC
- GP® Void Vent & Accessories





# Structural Waterproofing

## GP® TitanTech System


Below ground waterproofing is never straight forward, but with our unrivalled portfolio of products and systems, ensuring structural resistance to water ingress has never been easier!

We offer all round solutions, which can be tailored to even the most challenging requirement - above or below the ground. We consider the entire waterproofing process to the very last detail and can provide solutions for both new build and refurbishment projects.

- BS8102 compliant systems.
- Specialist Hydrocarbon barriers
- Local planning/Environment authority will require an assessment of risks to buildings from hazardous ground gasses.
- Insurance providers will require confirmation of any planning condition relating to soil ground gas investigations.

### System of Products

- GP® TitanBond
- GP® TitanBond Edge Strip
- GP® TitanTank
- GP® TitanTank EXT Tape
- GP® TitanTape
- GP® Titan OverTape
- GP® Primer
- GP® Sealant
- GP® Liquid Gas Barrier
- X8 CDM
- X20 CDM
- GP® Titan Pile Head Collars
- GP® Titan Pre Fab Unit
- PD1700

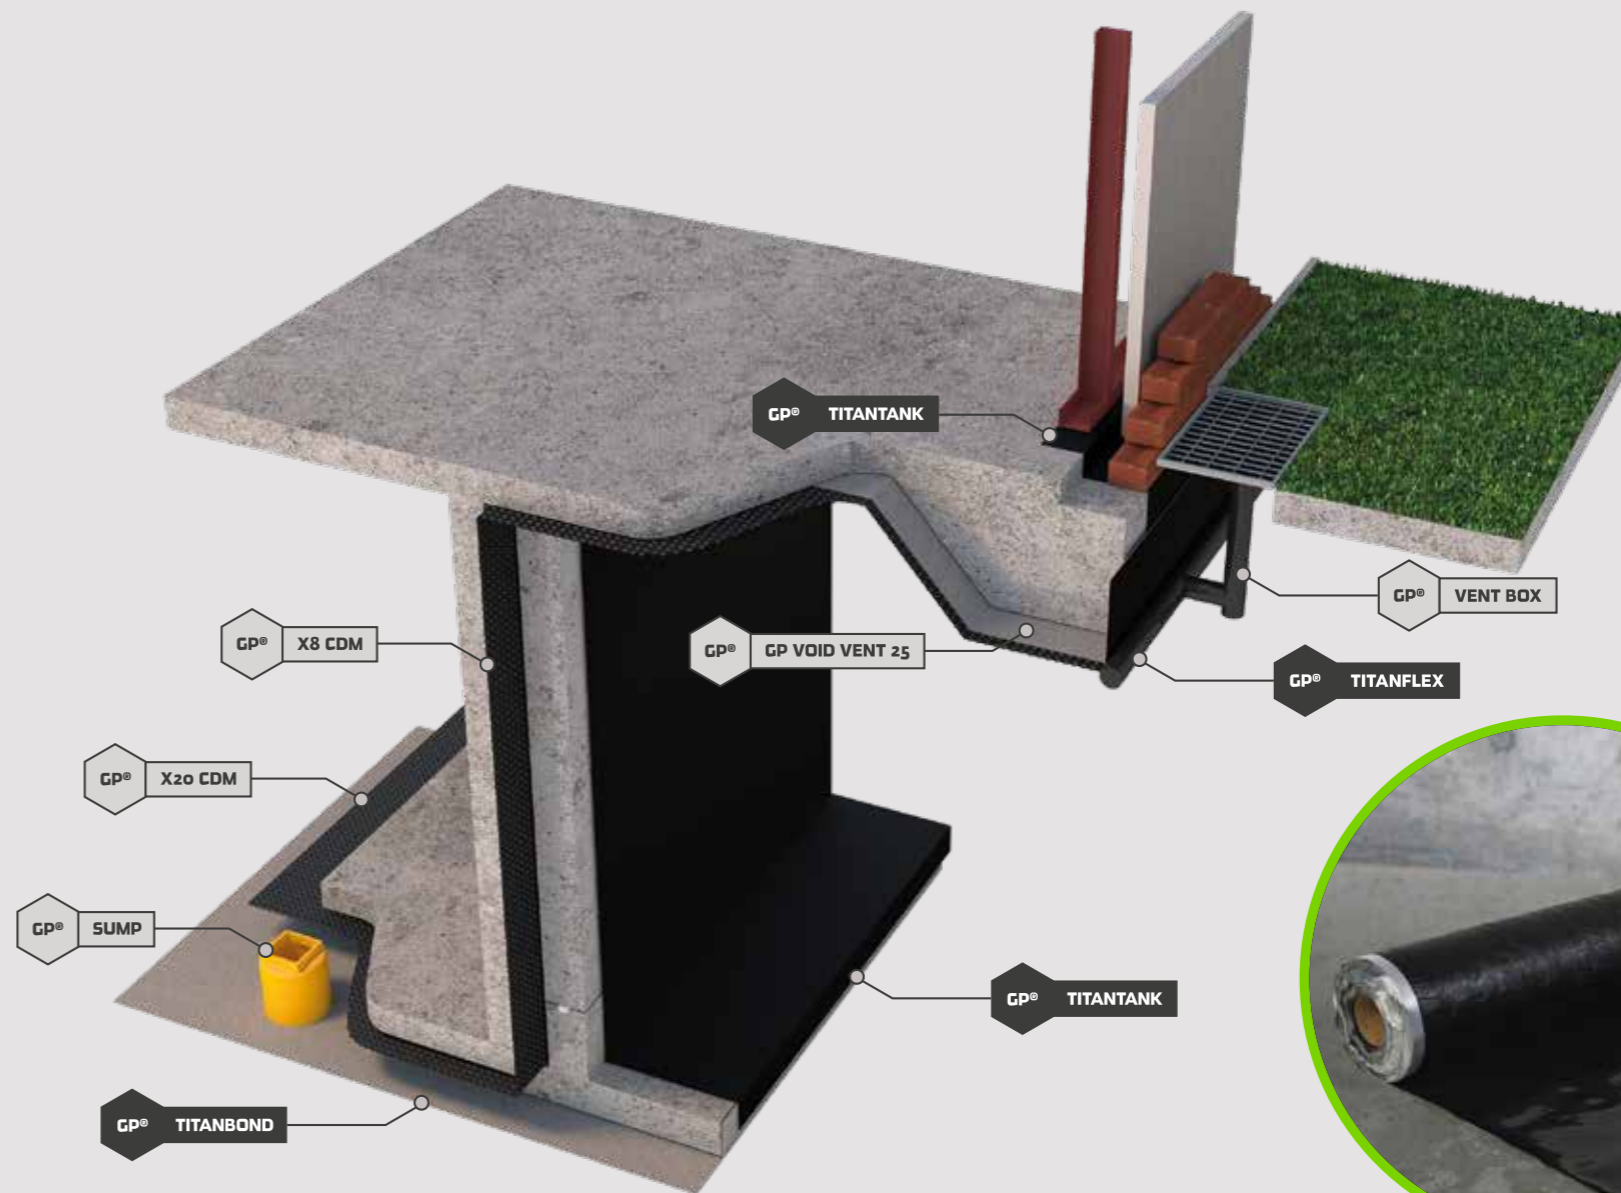

### GP® TITANBOND

A pre-applied fully bonded waterproofing membrane incorporating the GP® TitanFlex membrane and a heavy duty virgin polypropylene geotextile. The geotextile is laminated to the membrane to provide a dual function; protecting the membrane from damage, and providing an integrated 'bond' to poured concrete, ensuring a fully bonded waterproofing barrier which has exceptionally high resistance to ground gas and VOC's.

### GP® TITANTANK

A self adhesive version of the GP® TitanFlex; composed of self adhesive with an upper surface finish of GP® TitanFlex, and a lower surface finish of siliconized polypropylene release file. GP® TitanTank is used for Gas/Waterproofing/Tanking of underground structures where harmful ground gasses are anticipated, as a post-applied fully bonded membrane.

### GP® LIQUID GAS BARRIER

JUTA GP® Liquid Gas Barrier is a ready for use specialist styrene butadiene latex-based liquid applied membrane. It offers a simple, continuous passive gas prevention barrier against the ingress of methane, carbon dioxide, radon, ground gas, VOC, air and moisture into buildings. JUTA GP® Liquid Gas Barrier is compatible with loose laid membranes supplied by JUTA UK, such as JUTA GP®1, GP®2, GP®H and GP®TitanTech membranes.

### PD1700

JUTA UK PD1700 include a high compressive strength Cusate High Density Polyethylene (HDPE) drainage core with a geotextile filter geotextile bonded to one side. Protection Drainage (PD) 1700 is designed as a high flow medium to alleviate hydrostatic pressure on below ground structures, as well as providing protection to the underlying membrane (gas/waterproofing).

### GP® TITAN PILE HEAD COLLARS

A pre fabricated (to suit) pile head dimensions, to provide a seamless link and seal to pile heads, allowing time effective sealing to complex areas. Often finished with Pile Head Sealer to provide a flush surface.

### GP® TITAN PRE FABRICATED UNIT

Pre fabricated corners and pipe collars in GP(R) TITANFLEX membrane provided to enable a seamless barrier system which can be fully welded such that all joints are optimal durability.

### JUTA X8 CDM

An 8mm thick studded cavity drainage membrane, suitable for Type C waterproofing in accordance with BS8102:2009 to provide a grade 3 environment.

### JUTA X20 CDM

An 20mm thick studded cavity drainage membrane, suitable for Type C waterproofing in accordance with BS8102:2009 to provide a grade 3 environment.



Scan this QR code with your phone's camera to view our BBA certified products

//  
Cook Group and JUTA UK continuously deliver true value engineering and reassurance for our clients and their warranty providers nationwide using high quality BBA approved products.  
- Dave Cook, Cook Group

All data sheets can be downloaded at [juta.co.uk](http://juta.co.uk)



NSAI



# Hydrolock System

JUTA UK HYDROLOCK – Is a Mechanically bonded Geosynthetic Clay Liner composite of pulverised bentonite embedded between two layers of geotextile. The internal 5kg of natural sodium bentonite swells in contact with water to form a low permeability waterproofing barrier.



## HYDROLOCK 2

Hydrolock 2 is a mechanically bonded geosynthetic Clay Liner (GCL) composite of pulverised bentonite embedded between two layers of geotextile with an LLDPE membrane fixed to one side.

## HYDROLOCK STRIP

A swellable bentonite joint sealing tape with crystallization additives. Hydrolock Strip is used as a water stop in concrete construction joints and is tested and approved up to 7 bar water pressure.

## JUTA PILE HEAD SEALER

The Juta Pile Head Sealer is a crystalline cementitious waterproof slurry which creates a monolithic bond to the structure and seals the pile head. When mixed with clean water and applied correctly, it is designed to form a permanent waterproof coating to concrete piles in accordance with BS8102:2009.

## HYDROLOCK PASTE


Juta Hydrolock Paste is a plastic bentonite paste which is specifically designed for structural waterproofing. Hydrolock Paste is very easy to use, has excellent water absorption capacity and is biologically harmless, weather resistant, solvent free and frost resistant.

### System of Products

- Hydrolock
- Hydrolock 2
- Pile Head Sealer
- Hydrolock Paste
- Hydrolock Powder
- Hydrolock Strip
- Crystalline Active Barrier

# GP® Void Vent System

JUTA GP® Void Vent is a cusped HDPE core with a geotextile filter/separator bonded to a single side, in either 25mm or 40mm depth. The intended use of the Void Vent is to provide a means of ventilation when used in conjunction with an approved Gas Protection Barrier.

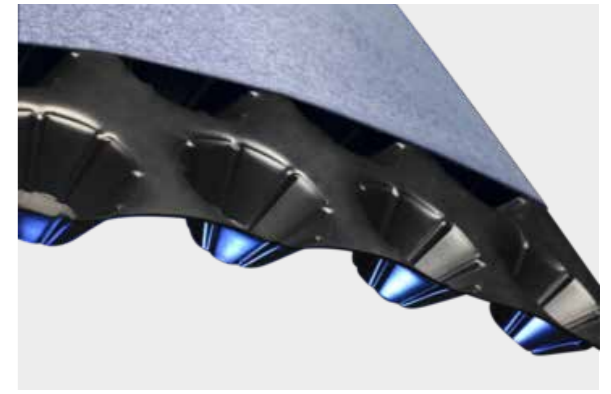

## GP® GULLY VENT BOX

JUTA Gully Vent Box – Is a ground level ventilation unit designed to work in combination with JUTA VOID VENT products to provide passive inflow and outflow of air and ground gas. The Vent Box is a fully modular system which provides a practical and aesthetic method of venting ground gases from beneath a building, to the external atmosphere. The vent boxes are designed to be installed within the external landscaping.

## GP® TELESCOPIC UNDERFLOOR VENT

Telescopic underfloor vents are used to create a clear airflow channel into voids below suspended timber and block and beam floors. The telescopic feature means the units are able to adjust the ventilation channel vertically from within the cavity.













## GP® RADON SUMP

is used as part of a radon protection measure in buildings and enables subfloor de-pressurisation or pressurisation to be introduced if required at a later date.

### System of Products

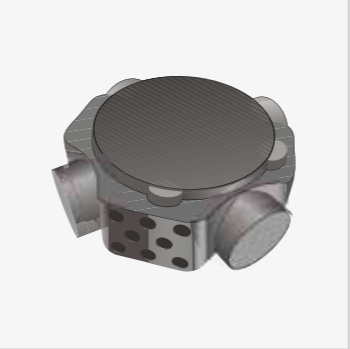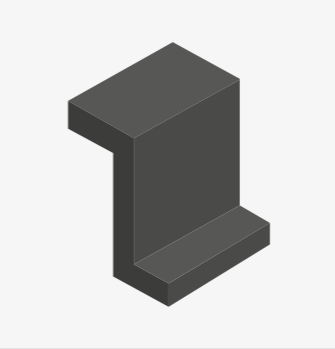- GP® Void Vent
- GP® Gully Vent Box
- GP® Telescopic Underfloor Vent
- GP® Solid Pipe
- GP® Slotted Carrier Pipe
- GP® Void Vent End Cap
- GP® Flat Tee Connector
- GP® Radon Sump

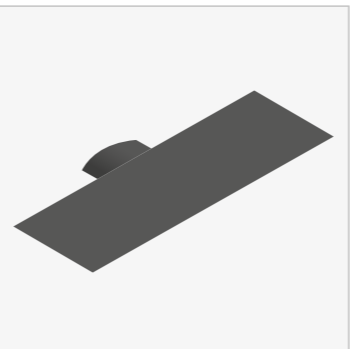

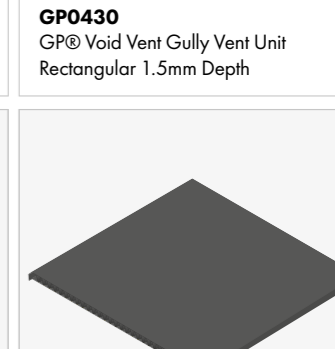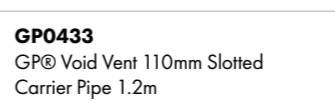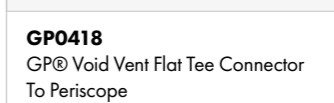			
<b>GP0431</b> GP® Radon Sump	<b>GP0426</b> GP® Void Vent Telescopic Underfloor Vent	<b>GP0425</b> GP® Void Vent Solid Pipe 110mm x 1m	<b>GP0425</b> GP® Void Vent Solid Pipe 110mm x 1m
			
<b>GP0417</b> GP® Void Vent Flat Tee Connector To 110mm Pipe	<b>GP0416</b> GP® Void Vent End Cap 110mm	<b>GP0429</b> GP® Void Vent Gully Vent Unit Circular 1.5mm Depth	<b>GP0430</b> GP® Void Vent Gully Vent Unit Rectangular 1.5mm Depth
			
<b>GP0433</b> GP® Void Vent 110mm Slotted Carrier Pipe 1.2m	<b>GP0418</b> GP® Void Vent Flat Tee Connector To Periscope	<b>GP0400/GP0401</b> GP® Void Vent 25mm/40mm	<b>GP0400/GP0401</b> GP® Void Vent 25mm/40mm



# Containment Engineering

Containment engineering involves the process of preventing contamination entering the built environment. Covering a wide range of applications including; Landfill Sites, Quarries and & Mines, AD Biogas, Leachate Treatment, Fracking and Storage Lagoons.

Our extensive range of geosynthetics enables the most appropriate solution to be selected for the appropriate environment. Consideration should always be given to the specific site conditions and the anticipated life of the containment project.



## System of Products

- ◆ Junifol HDPE
- ◆ Junifol LLDPE
- ◆ GeoNETEX 300 TT
- ◆ GP® TitanFlex



**GP® TITANFLEX** – Gas and hydrocarbon barrier is a multi-layer, polyethylene membrane. GP® TITANFLEX is specifically designed, manufactured, tested and certified to perform as a methane, carbon dioxide, radon, ground gas, VOC, air & moisture and hydrocarbon protection system.

We at Prestige Air Technology have dealt with JUTA for a number of years now. The range of products, the technical support, and their ability to get the products to our sites often at short notice is fantastic. Everyone I have dealt with in their organisation has been friendly and knowledgeable and they have always provided me with a great service.

- Andy Collins, Prestige Air Technology

### Junifol HDPE

JUNIFOL HDPE is a High-Density Polyethylene Geomembrane. It is designed to protect structures from the ingress of moisture, water, liquids, radon, carbon dioxide and methane together with chemicals.

### Junifol LLDPE

JUNIFOL LLDPE is a linear low-density polyethylene monolithic geomembrane. JUNIFOL LLDPE is designed to protect structures from the ingress of moisture, water, liquids, radon, carbon dioxide and methane together with chemicals.

### GeoNETEX 300 TT

300 TT Nonwoven geotextile manufactured from UV stabilised, high tenacity, virgin polypropylene fibers that have been mechanically entangled to provide high strength, high extensibility, high loft and excellent abrasion characteristics. 300TT is certified against a range of EN standards for separation, filtration & protection.

# Civil Engineering

Civil Engineering is a broad application sector, including application scenarios such as Highway Construction, Rail Engineering Works, SUDS Lagoons, Tunnels, Water Storage, Coastal Protection, Landscaping & Buildings.

To ensure we are at the forefront of innovation and development, we are fully integrated with international standards committees to aid the development of the next generation of materials. If you're looking to get it right the first time, and want to use innovative and high performance geosynthetics - then you've come to the right place.

- SUDS System, including hydrocarbon membranes.
- Woven and non-woven geotextiles.
- GCL and Membranes for storage lagoons.
- Ensured compliance with regulatory standards.



Scan this QR code with your phone's camera to view our BBA certified products



# Attenuation & SuDS

**HDPE 0.6mm** is a mono layer, high density polyethylene membrane specifically designed and manufactured to perform as a robust waterproofing barrier protection system, which is suitable for use in various demanding geomembrane applications such as SUDS, Root Barrier, Waterproofing and Radon Protection and Permeable Paving.

**HDPE 0.6mm** is a fully weldable, category 2 attenuation grade liner fully conformant to C753 and BS7533-13 and is CE marked for use in the following application areas: EN13967 (A/T). HDPE 0.6mm provides resistance to root penetration from invasive species, including (but not limited to): Japanese Knotweed, Bamboo, Mustard seed, Meadow Grass, Ivy, Hybrid poplars, Willow, Elm, Maple, Mare's tail, ground creeping plants, edible plants and aquatic plants.

## Typical Applications

- Attenuation tank encapsulations (SUDS)
- Containment and cut-off trenches
- Pond/Lagoon Lining
- Radon Barrier
- Porous Sub-base installations
- Structural waterproofing
- Landfill Base/Capping
- Invasive Weed Barrier

## System of Products

- 0.6mm HDPE
- 0.75mm HDPE
- GP®H
- GeoNETEX 300 TT
- JUTAMAT 5000



## GP®H

JUTA GP®H Hydrocarbon and Gas Barrier is a mono layer, High density polyethylene membrane. GP®H is specifically designed and manufactured to perform as a Hydrocarbon and VOC, air & Moisture protection system. JUTA GP®H complies with the latest codes of practice as published by BRE and CIRIA. Suitable for use as gas protection for NHBC GREEN and AMBER 1 site characterisations. JUTA GP®H is also suitable as a Hydrocarbon barrier.

## GeoNETEX 300 TT

300 TT Nonwoven geotextile manufactured from UV stabilised, high tenacity, virgin polypropylene fibers that have been mechanically entangled to provide high strength, high extensibility, high loft and excellent abrasion characteristics. 300TT is certified against a range of EN standards for separation, filtration & protection. 300TT protection geotextile is also a Class 3 Separator/Filter Geotextile to BS8661.

## JUTAMAT 5000

JUTAMAT is a mechanically bonded Geosynthetic Clay Liner (GCL) composite of pulverised bentonite embedded between two layers of geotextile. The internal 5kg of natural sodium bentonite swells in contact with water to form a low permeability waterproofing barrier. Bentonite absorbs water from the surrounding soil, its expansion is impeded by layer pressure from the geotextile membranes creating an impermeable lining material able to be used as a containment barrier.



Scan this QR code with your phone's camera to view our BBA certified products

Hewitech have partnered with Juta as membrane supplier for our SUDS and attenuation systems for eight years. Our experience has been Juta supplying quality materials, with responsive deliveries backed up by excellent technical service  
- Dave Fozzard - Hewitech UK



# Agriculture

JUTA has extensive knowledge and experience when it comes to the production and sale of its netwrap products. Agricultural netting is focused on its strength, elongation and coverage of bales. These attributes guarantee more compact and better-looking bales which can be handled and transported more easily.

**JUTA Round Bale Netwrap** allows for high speed wrapping, saves twice as much time and cuts your costs. It is manufactured from high-quality raw materials using advanced technological processes. It is produced on worldwide well-known Karl Meyer knitting machines. Daily production control in accordance with ISO certification guarantees perfect quality.

## Why JUTA Netwrap?

- Applicable for hay, straw, silage or dried fodder crops packing.
- Superior tensile strength of the net.
- Bales are symmetrically fully covered from one edge to another.
- Last 50m of net on the roll are marked by red stripes, informing the operator to prepare a new roll.
- High UV protection guarantees longer lifetime and reliability of the net on field.
- Coloured edges inform the operator about right and left side of the roll making the correct loading easier.
- Tested on all common types of round bailing machines used worldwide.
- Continuous quality control during production process in accordance with ISO certification.
- Produced from environmentally-friendly HDPE (High-density-polyethylene).

Contact us to find out about our Netwrap products.



# Netwrap & Twine



## JUTA Twine

All our baler twine are manufactured from a single tape, using only the highest quality raw materials. This guarantees a precise & uniform twist in the twine. We manufacture and supply twine for all modern high density conventional pick-up balers.

Contact us to find out about our twine products.

# Artificial Grass

JUTA grass® develops, produces and markets a wide-ranging choice of artificial turf for the sport and leisure as well as professional landscaping markets. JUTA grass® is able to offer a broad choice of turf on the latest generation of high quality artificial turf base layers. With all components being produced and integrated into a long lasting product within one location JUTA are able to guarantee complete quality control and assurance.



## Sports

JUTA's research and development departments work in close cooperation with world renowned experts, application engineers and sports professionals to constantly innovate and improve our product offering. The extremely durable sports surfaces we manufacture for amateur sports clubs as well as high-performance turf for the world's top clubs and leagues are the result of this relentless pursuit of perfection.

JUTA manufacture and supply artificial grass for the following sporting fields:

- Football
- Tennis
- Hockey
- Rugby
- Golf/Minigolf
- Multisport
- Playgrounds

## Gardens & Landscaping

JUTAgass® artificial grasses are so real to the eye and to the touch. Using more than one shade of green in combination with browns and yellows colour, carefully chosen pile height and rigidity of fibers, mixture of curled and straight yarns give the impression of natural grass, which finds use not only in the garden but also around swimming pools, parks, whether as decorative lawn or grass that can also absorb high foot flow.

JUTA manufacture and supply artificial grass for the following landscaping environments:

- Gardens & Pools
- Balconies & Terraces
- Playgrounds & Schools
- City Landscaping

**Ridge F Plus** is available in 3m, 6m and 10m kits. All the components are of high quality and manufactured to make installation quick and simple.

- Ventilated ridge roll with pumped butyl for a quality seal. Universal ridge unions compatible with almost all ridge tiles.
- Super strength nylon "ratchet" clips give superior strength & durability with a flat profile for an improved subtle aesthetic.
- Mortar free
- Resistant to wind and water
- Vapour permeable
- Simple installation requires no special tools.
- Self-adhesive butyl strip provides a water tight seal & permanent bond.
- Corrosion resistant stainless steel batten straps for improved stability in both hip and ridge applications, and compliant with BS5534 mechanical fix requirements.
- Available in grey, black and terracotta to match most tile colours

**Hip Accessory pack**

We also sell a supplementary kit for hip applications, to be used in conjunction with the ridge kits. Kit Contents:

- Short & long leg ratchet clips
- Cut tile fixing clips
- Hip Trays (sufficient to run along a 6m hip)

**Hip Tray**

Made from PVC, our hip trays are 1.2m in length by 250mm wide. Fitted above the Ridge Roll, they are designed to provide an even, level run to the hip of a roof.

**Hip Clip Pack**

The hip clip has been designed to secure the cut single lap on the hip tiles. Kit Contents:

- 20 x Large Hip Clips
- 20 x Small Hip Clips

**Maintenance Pack**


Ridge F Plus Maintenance Pack has been designed to replace lost or broken large fixing clips. Kit Contents:

- 100 x Screws
- 100 x Large Clips (Black or Terracotta)

**Suitable for**

- Concrete and clay ridge tiles
- Most slate and tile profiles

Product Code	Product Description	Size	Colour	Box Quantity	Pallet Quantity
EASYRIDGEF+3/BL	Ridge F Plus Kit	3 Metre	Black	Singles	90
EASYRIDGEF+6/BL	Ridge F Plus Kit	6 Metre	Black	Singles	80
EASYRIDGEF+10/BL	Ridge F Plus Kit	10 Metre	Black	Singles	60
EASYRIDGEF+3/TE	Ridge F Plus Kit	3 Metre	Terracotta	Singles	90
EASYRIDGEF+6/TE	Ridge F Plus Kit	6 Metre	Terracotta	Singles	80
EASYRIDGEF+10/TE	Ridge F Plus Kit	10 Metre	Terracotta	Singles	60
EASYRIDGEF+3/MTR	Ridge F Plus Kit	3 Metre	Grey	Singles	90
EASYRIDGEF+6/MTR	Ridge F Plus Kit	6 Metre	Grey	Singles	80
EASYRIDGEF+10/MTR	Ridge F Plus Kit	10 Metre	Grey	Singles	60
EASYRIDGE/HIPKIT	Hip Accessory Kit	For a 6m Hip	Grey	Singles	60
HIPTRAY/1.2	Hip Tray	1.2 Metre	Grey	Singles	1000
ET/HIPCLIP	Hip Clip Pack	N/A	N/A	35	20
EASYRIDGE+MP/BL	Maintenance Pack	100 Per Pack	Black	Singles	N/A
EASYRIDGE+MP/TE	Maintenance Pack	100 Per Pack	Terracotta	Singles	N/A
EASYRIDGEFMP	Maintenance Pack	100 Per Pack	Grey	Singles	N/A
EASYRIDGE+MPU/BL	Union Maintenance Pack	50 Per Pack	Black	Singles	N/A
EASYRIDGE+MPU/TE	Union Maintenance Pack	50 Per Pack	Terracotta	Singles	N/A
EASYRIDGE+MPU	Union Maintenance Pack	50 Per Pack	Grey	Singles	N/A
EASYRIDGE+UP/BL	Union Pack	6 Per Pack	Black	Singles	N/A
EASYRIDGE+UP/TE	Union Pack	6 Per Pack	Terracotta	Singles	N/A
EASYRIDGE+UP	Union Pack	6 Per Pack	Grey	Singles	N/A

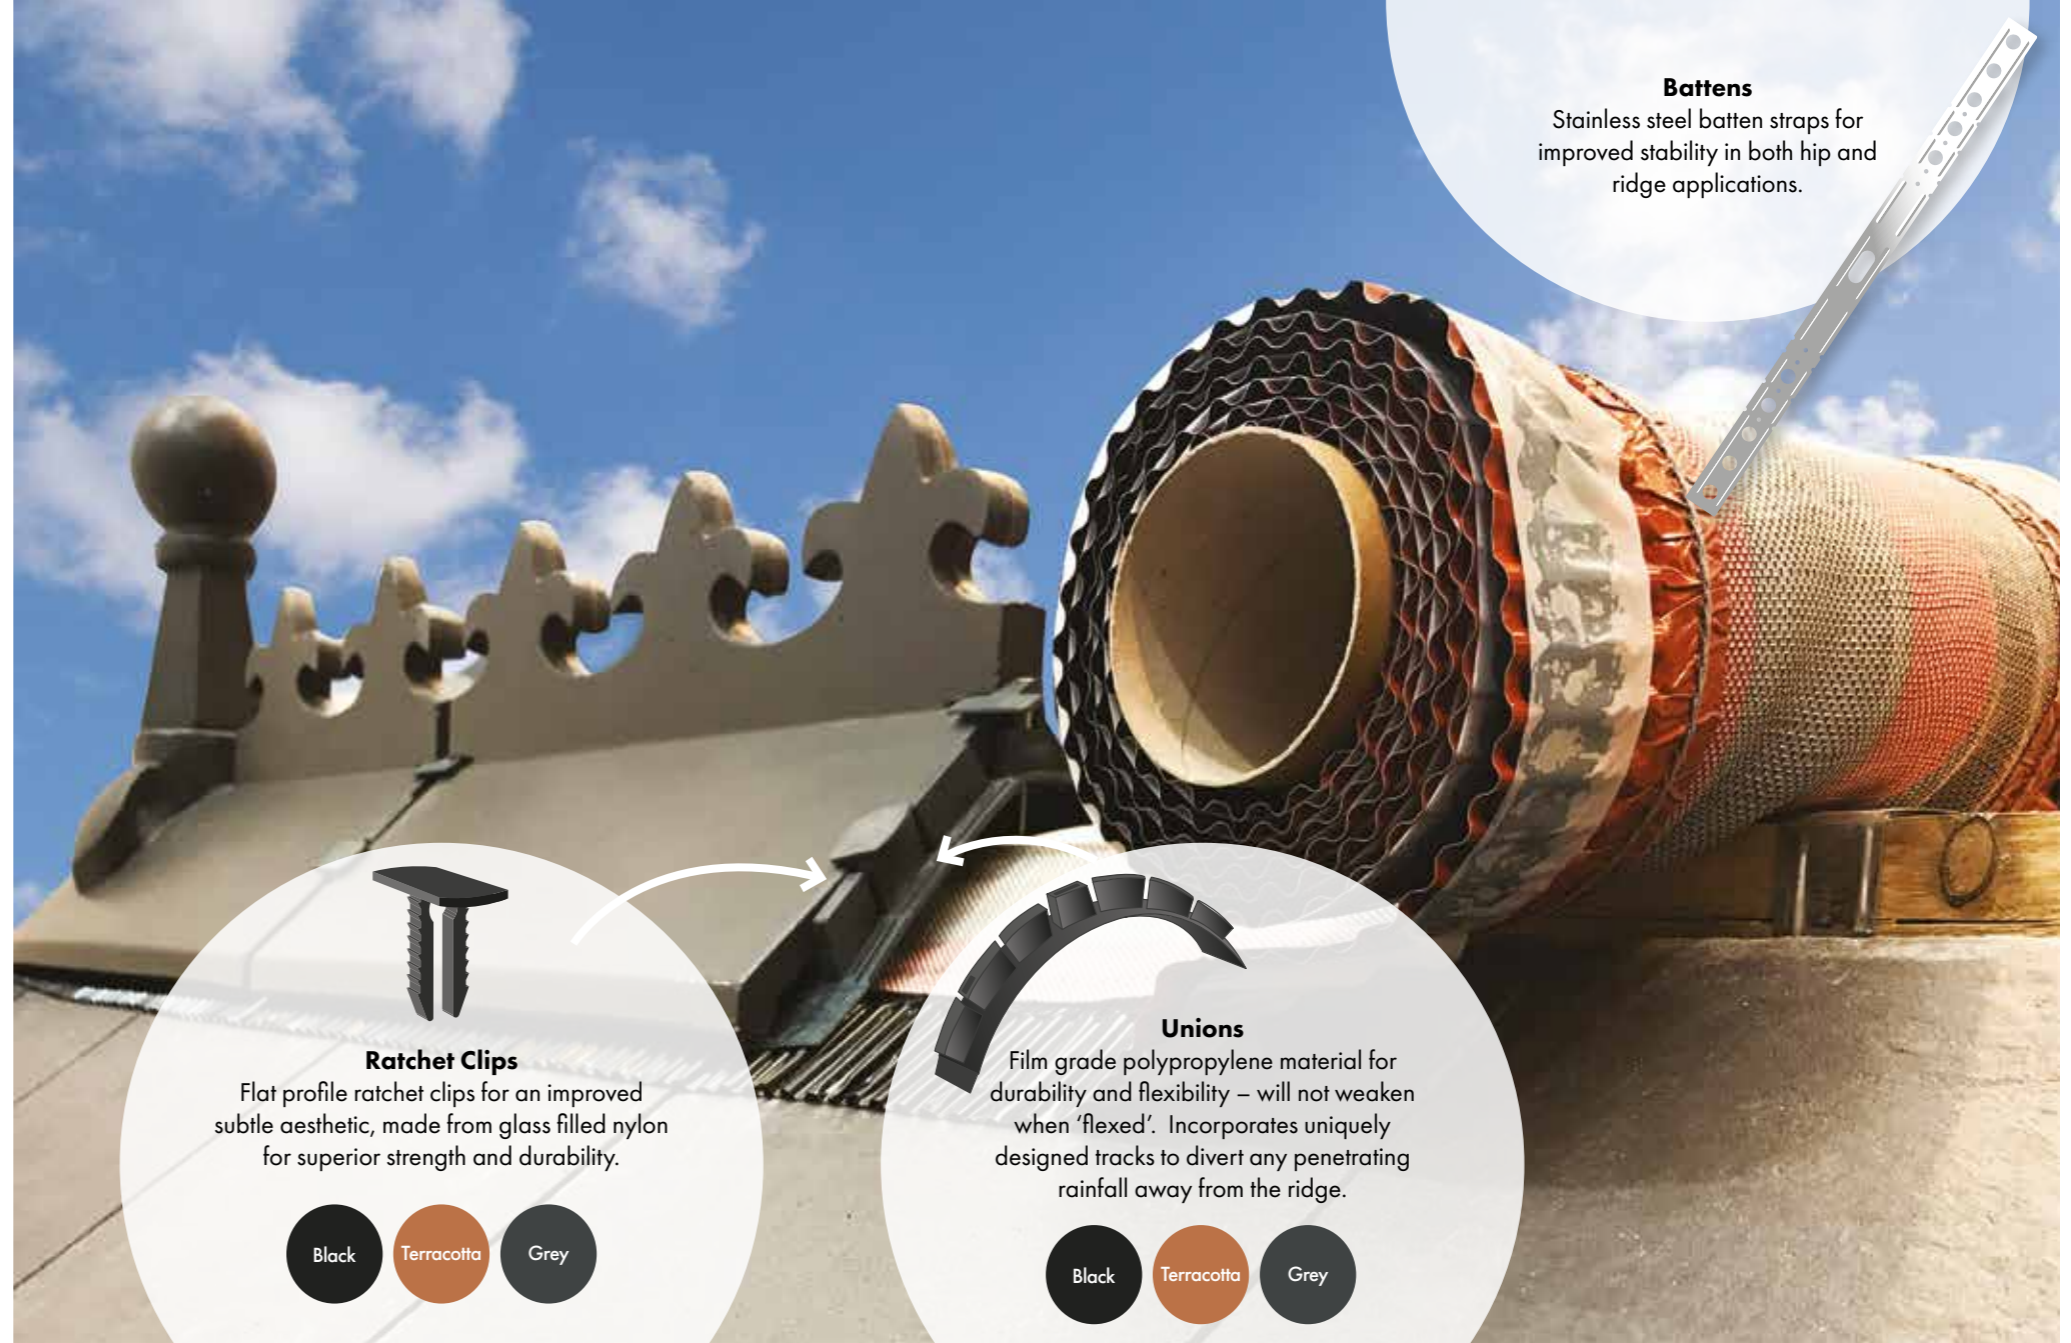

**Battens**  
Stainless steel batten straps for improved stability in both hip and ridge applications.

**Ratchet Clips**  
Flat profile ratchet clips for an improved subtle aesthetic, made from glass filled nylon for superior strength and durability.

Black   Terracotta   Grey

**Unions**  
Film grade polypropylene material for durability and flexibility – will not weaken when 'flexed'. Incorporates uniquely designed tracks to divert any penetrating rainfall away from the ridge.

Black   Terracotta   Grey

**Union Maintenance Pack**


Ridge F Plus Union Maintenance Packs have been designed to replace lost or broken unions and clips. Kit Contents:

- 50 x Unions
- 50 x Large Clips
- 100 x Small Clips
- Screws



Ridge F is available in 3m, 6m and 10m kits in black and terracotta. All the components are of high quality and manufactured to make installation quick and simple.

Product Code	Product Description	Size	Colour	Box Quantity	Pallet Quantity
EASYRIDGE3MTR	Ridge F Kit	3 Metre	Black	Singles	90
EASYRIDGE6MTR	Ridge F Kit	6 Metre	Black	Singles	80
EASYRIDGE10MTR	Ridge F Kit	10 Metre	Black	Singles	60
EASYRIDGE3MTR/T	Ridge F Kit	3 Metre	Terracotta	Singles	90
EASYRIDGETERRA	Ridge F Kit	6 Metre	Terracotta	Singles	80
EASYRIDGE10MTR/T	Ridge F Kit	10 Metre	Terracotta	Singles	60
EASYRIDGE/CLAY	Ridge F Kit - Clay Tiles	6 Metre	Black	Singles	80

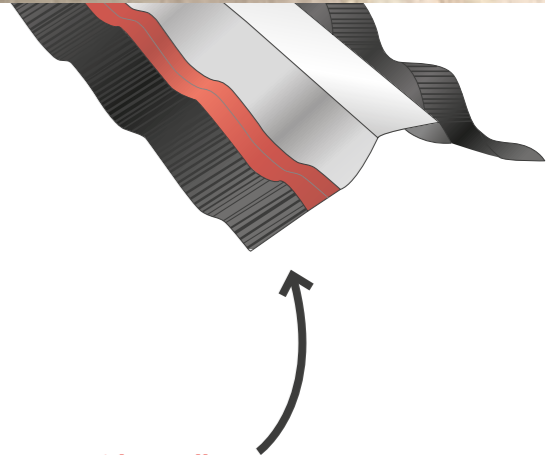

**Ridge Roll**

Manufactured from a polypropylene hydrophobic mesh that allows the roof to breathe whilst repelling water. A central white fabric strip along the centre of the roll enables accurate installation ensuring a neat and aesthetically pleasing ridge line. Corrugated aluminium allows a constant 5mm of ventilation. A pumped butyl self-adhesive strip allows a watertight permanent bond without compromising the integrity of airflow.

# easy-trim Verge U

**Verge U** is truly universal in that the units can be used on the left and right side of the verge, and they are fully compatible with most tile types. The unique design combines fast, simple installation with exceptional holding qualities.

- Manufactured from polypropylene for superior flexibility and ease of installation.
- Universal handed units; left & right hand pieces no longer required.
- Complies with BS5534 mechanical fixing requirements.
- Installation suitable in all weather conditions.
- Tight secure fit, not vulnerable to wind-dislodgement.
- Excellent UV and colour stability, no fading or unsightly staining on soffits.
- Available in black, terracotta, grey and brown.

## Starter & End Caps

Our unique starter unit includes a verge end closure and a blanking cap to ensure a secure, infestation free and aesthetically pleasing finish. For use in both new build and refurbishment application, the unit is UV stable and comes in 4 colours. Pack contains: 2 starter/end caps and 2 blanking plates.

Black Terracotta Grey Brown

## Verge Units

The ultimate universal, high speed, high quality easy install dry verge. Left and right handed units are no longer required as Easy Verge U is truly universal. The unique design is quick and easy to install on any tile type and has exceptional holding qualities. A tight secure fit is easily achieved ensuring roof tiles are held firmly in place and not vulnerable to wind dislodgement.

Black Terracotta Grey Brown

## Ridge Caps

Our high quality, UV stable half round ridge caps incorporate unique and innovative Flap Cap Technology. Flexible flaps contour around the sides of the Easy Verge U system effectively creating a 'sealed' unit that prevents water ingress and infestation.

FlapCap TECHNOLOGY

Black Terracotta Grey Brown

# easy-trim Verge C



**Verge C** provides a complete and continuous watertight cover for the joint between roof tiles and brick work or bargeboard, giving greater security to the verge. Continuous dry verge is a fast and effective dry fix solution, without the inconvenience of using mortar and clips, providing a maintenance free, clean and attractive finish to gable ends.

Black Brown White



Product Code	Product Description	Colour	Box Quantity	Pallet Quantity
EASYVERGEU/BLK	Verge Unit	Black	50	800
EASYVERGEU/TERRA	Verge Unit	Terracotta	50	800
EASYVERGEU/GREY	Verge Unit	Grey	50	800
EASYVERGEU/BROWN	Verge Unit	Brown	50	800
EASYVERGEU/BL/PCK	Starter & End Pack	Black	10	480
EASYVERGEU/T/PCK	Starter & End Pack	Terracotta	10	480
EASYVERGEU/G/PCK	Starter & End Pack	Grey	10	480
EASYVERGEU/B/PCK	Starter & End Pack	Brown	10	480
EASYVERGEU/HR/BL	Half Round Ridge Cap	Black	10	800
EASYVERGEU/HR/T	Half Round Ridge Cap	Terracotta	10	800
EASYVERGEU/HR/G	Half Round Ridge Cap	Grey	10	800
EASYVERGEU/HR/B	Half Round Ridge Cap	Brown	10	800
EASYVERGEU/A/BL	Angled Ridge Cap	Black	10	800
EASYVERGEU/A/T	Angled Ridge Cap	Terracotta	10	800
EASYVERGEU/A/G	Angled Ridge Cap	Grey	10	800
EASYVERGEU/A/B	Angled Ridge Cap	Brown	10	800
EASYVERGEU/CLIP	Batten End Clip	N/A	N/A	N/A

Product Code	Product Description	For Tile Types	Colour	Box Quantity	Pallet Quantity
VERGE/SLATE/BLK5	S Type 5 Metre Continuous Verge	Slate Tiles	Black	3	N/A
VERGE/SLATE/BRN5	S Type 5 Metre Continuous Verge	Slate Tiles	Brown	3	N/A
VERGE/SLATE/WHT5	S Type 5 Metre Continuous Verge	Slate Tiles	White	3	N/A
CDV/SLATE/CONN/B	S Type Connector	Slate Tiles	Black	1	N/A
CDV/SLATE/CONN/BN	S Type Connector	Slate Tiles	Brown	1	N/A
CDV/SLATE/CONN/W	S Type Connector	Slate Tiles	White	1	N/A
CDV/SLATE/END/B	S Type Ridge Cap	Slate Tiles	Black	1	N/A
CDV/SLATE/END/BN	S Type Ridge Cap	Slate Tiles	Brown	1	N/A
CDV/SLATE/END/W	S Type Ridge Cap	Slate Tiles	White	1	N/A
CDV/RTYPE/BLK/5M	R Type 5 Metre Continuous Verge	Low Profile Tiles	Black	3	N/A
CDV/RTYPE/BRN/5M	R Type 5 Metre Continuous Verge	Low Profile Tiles	Brown	3	N/A
CDV/RTYPE/WHT/5M	R Type 5 Metre Continuous Verge	Low Profile Tiles	White	3	N/A
CDV/RTYPE/CONN/B	R Type Connector	Low Profile Tiles	Black	1	N/A
CDV/RTYPE/CONN/BN	R Type Connector	Low Profile Tiles	Brown	1	N/A
CDV/RTYPE/CONN/W	R Type Connector	Low Profile Tiles	White	1	N/A
CDV/RTYPE/END/B	R Type Ridge Cap	Low Profile Tiles	Black	1	N/A
CDV/RTYPE/END/BN	R Type Ridge Cap	Low Profile Tiles	Brown	1	N/A
CDV/RTYPE/END/W	R Type Ridge Cap	Low Profile Tiles	White	1	N/A
CDV/DTYPE/BLK/5M	D Type 5 Metre Continuous Verge	High Profile Tiles	Black	3	N/A
CDV/DTYPE/BRN/5M	D Type 5 Metre Continuous Verge	High Profile Tiles	Brown	3	N/A
CDV/DTYPE/W/5M	D Type 5 Metre Continuous Verge	High Profile Tiles	White	3	N/A
CDV/DTYPE/CON/BL	D Type Connector	High Profile Tiles	Black	1	N/A
CDV/DTYPE/CON/BR	D Type Connector	High Profile Tiles	Brown	1	N/A
CDV/DTYPE/CON/WH	D Type Connector	High Profile Tiles	White	1	N/A
CDV/DTYPE/END/BL	D Type Ridge Cap	High Profile Tiles	Black	1	N/A
CDV/DTYPE/END/BR	D Type Ridge Cap	High Profile Tiles	Brown	1	N/A
CDV/DTYPE/END/WH	D Type Ridge Cap	High Profile Tiles	White	1	N/A

# easy-trim Membranes

Vapour permeable and airtight breather membrane, designed for use in both fully supported and unsupported installations in tiled or slate pitch roofs and walls. Suitable for all applications on warm, cold and hybrid roofs, together with installations on Scottish sarking boards, and equally suitable for installations in timber and steel frame constructions.

- Suitable for warm and cold roofing construction.
- 3 layer thermally bonded construction vapour permeable range.
- BBA certified for warm and cold roof applications BBA 10/4753.
- Conforms to BS5534.2014 Annex A
- All our range is printed with a grid for simple cutting.
- UV stable for 3 months.
- High breathability.
- LR Underlay.
- Vapour permeable.

### Did you know?

In addition to our popular breather membranes we also have our Integrate range which feature high performance, integrated acrylic tapes to allow rapid installation without the need for battened overlaps. This saves on cost, time and reduces potential health and safety issues. All Integrate membranes are suitable for all 5 National Wind Zones as specified in BS5534 Annex A.



Product Code	Product	No. of Layers	Colour	Size	Weight	Pallet Quantity
EASYTRIMMAXI1	Maxi	3	Dark Blue Felt with White Grid	1M x 50M	132GSM	42
EASYTRIMMAXI15	Maxi	3	Dark Blue Felt with White Grid	1.5M x 50M	132GSM	36
ET/MAXI/INTE/1	Maxi Integrate	3	Dark Blue Felt with White Grid	1M x 50M	132GSM	42
ET/MAXI/INTE/1.5	Maxi Integrate	3	Dark Blue Felt with White Grid	1.5M x 50M	132GSM	36
EASYTRIMULTRA/1M	Ultra	3	Light Blue Felt with Black Grid	1M x 50M	142GSM	48
EASYTRIMULTRA/15	Ultra	3	Light Blue Felt with Black Grid	1.5M x 50M	142GSM	36
EASYTRIMVISTA1	Vista	3	Green Felt with Yellow Grid	1M x 50M	162GSM	36
EASYTRIMVISTA15	Vista	3	Green Felt with Yellow Grid	1.5M x 50M	162GSM	30
ET/VIST/INTE1	Vista Integrate	3	Green Felt with Yellow Grid	1M x 50M	162GSM	36
EASYTRIMFORT1.5	Fortis	4	Green Reinforced Felt with Yellow Grid	1.5M x 50M	160GSM	30
ET/FORT/INTE/1.5	Fortis Integrate	4	Green Reinforced Felt with Yellow Grid	1.5M x 50M	160GSM	30
NONBREATH	Non-Breathe	2	Black Felt with White Grid	1M x 45M	N/A	48

Product Code	Product	No. of Layers	Colour	Size	Weight	Pallet Quantity
EASYTRIMGRAFT1	Grafter	3	Grey Felt with Red Grid	1M x 50M	100GSM	60
EASYTRIMGRAFT1.5	Grafter	3	Grey Felt with Red Grid	1.5M x 50M	100GSM	42
ET/GRAFT/INTE/120	Grafter Integrate	3	Grey Felt with Red Grid	1M x 20M	100GSM	60
ET/GRAF/INTE/1	Grafter Integrate	3	Grey Felt with Red Grid	1M x 50M	100GSM	60
EASYTRIMMASTER1	Master	3	Grey Felt with Blue Grid	1M x 50M	112GSM	54
EASYTRIMMASTER15	Master	3	Grey Felt with Blue Grid	1.5M x 50M	112GSM	49
ET/MAST/INTE/1	Master Integrate	3	Grey Felt with Blue Grid	1M x 50M	112GSM	54
PROEASYTRIM/1M	Pro	3	Grey Felt with Black Grid	1M x 50M	122GSM	54
PROEASYTRIM/1.5M	Pro	3	Grey Felt with Black Grid	1.5M x 50M	122GSM	49
ET/PRO/INTE/1	Pro Integrate	3	Grey Felt with Black Grid	1M x 50M	122GSM	54
ET/PRO/INTE/1.5	Pro Integrate	3	Grey Felt with Black Grid	1.5M x 50M	122GSM	49

### Accessories

Product Code	Product	Size	Box Quantity	Pallet Quantity
ET/REPAIR/50X25	Repair Tape	50mm x 25m	24	576
OVERLAPTAPE	Overlap Tape	38mm x 50m	12	384

Summary of test results for wind uplift resistance of Easy-Trim Integrate underlays to BS5534 Annex A

Membrane	Geographical Wind Zones
GRAFTER	Zones 1 - 5
MASTER	Zones 1 - 5
PRO	Zones 1 - 5
MAXI	Zones 1 - 5
FORTIS	Zones 1 - 5

Official 'BRE' test results

# easy-trim Cavity & Insulation

Following significant investments in production and tooling, Easy-trim continue on their growth trajectory with the introduction of a range of cavity, underfloor and brick ventilation products.

All British manufactured to the highest quality, the range includes telescopic vents, cavity extension sleeves, brick vents, weep and peep vents and cavity closers.

Designed to create airflow through the cavity and eliminate condensation, the products interconnect for flexibility and are available in various colours to sit inconspicuously on the external wall. All the products conform to BS5250 code of practice for control of condensation in buildings, NHBC technical requirements and also building regulations where relevant.

## Weep Vents

Our Weep vents have an integral grill design to prevent rain ingress during high winds and a lip to ease positioning during use. It is wide enough not to become blocked by day to day debris yet small enough to prevent access by large insects.



## Peep Vents

Our Peep vents provide cavity wall drainage solutions, allowing rain water to easily escape the cavity wall via a discreet aperture in the vent.





## Telescopic Underfloor Vents

Telescopic underfloor vents are used to create a clear airflow channel into voids below suspended timber and block and beam floors. The telescopic feature means the units are able to adjust the ventilation channel vertically from within the cavity.



## Brick Vents

Brick vents are ventilated plastic blocks that are similar in size and shape to standard house bricks. Used to create an airflow beneath ground-level timber floors where there is a void. Size: 9inch x 3inch.

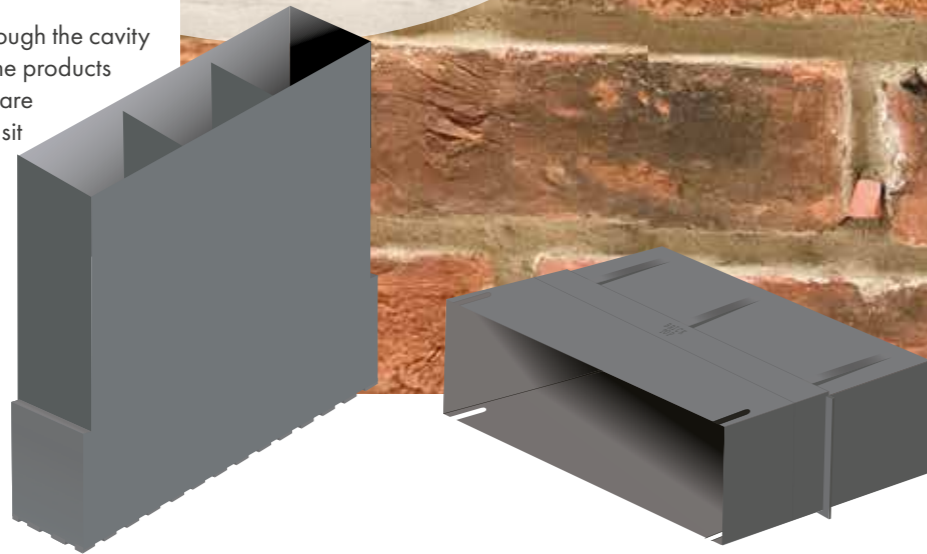

## Cavity Vertical Extension Sleeve

The Cavity Vertical Extension Sleeve is designed to be used in conjunction with the telescopic underfloor vent. Each extension sleeve allows the vent to vertically reach a further two brick courses and can also be fitted to the base of the Telescopic Underfloor Vent providing horizontal extension. fixing clips. Kit Contents:

- 100 x Screws
- 100 x Large Clips (Black or Terracotta)

## Cavity Sleeve

Cavity sleeves are used in conjunction with Brick Vents and are used to provide ventilation through a standard cavity or solid brick walls. The units are telescopic and can be stacked to 9x6 or 9x9 variations and can be used to fit cavity widths of 50 mm to 100mm. Further extension can be achieved by using multiple units.

Black

Black



Product Code	Product Description	Colour	Box Quantity	Pallet Quantity
EDEV/WEEP/BLACK	Weep Vent	Black	50	N/A
EDEV/WEEP/TERRA	Weep Vent	Terracotta	50	N/A
EDEV/WEEP/GREY	Weep Vent	Grey	50	N/A
EDEV/WEEP/CLEAR	Weep Vent	Clear	50	N/A
EDEV/WEEP/BUFF	Weep Vent	Buff	50	N/A
EDEV/WEEP/WHITE	Weep Vent	White	50	N/A
EDEV/WEEP/BROWN	Weep Vent	Brown	50	N/A
EDEV/PEEP/BLACK	Peep Vent	Black	100	N/A
EDEV/PEEP/TERRA	Peep Vent	Terracotta	100	N/A
EDEV/PEEP/CLEAR	Peep Vent	Clear	100	N/A
EDEV/PEEP/BUFF	Peep Vent	Buff	100	N/A
ET/CAVITY/VEXT	Cavity Vertical Extension Sleeve	Black	5	N/A
ET/CAVITY/SLEEVE	Cavity Sleeve	Black	5	N/A
EDEV/TELE/UVENT	Telescopic Underfloor Vent	Black	20	N/A
EDEV/AB/BLBK	Brick Vent	Black	20	N/A
EDEV/AB/TERRA	Brick Vent	Terracotta	20	N/A
EDEV/AB/GREY	Brick Vent	Grey	20	N/A
EDEV/AB/BUFF	Brick Vent	Buff	20	N/A
EDEV/AB/WHITE	Brick Vent	White	20	N/A
EDEV/AB/BROWN	Brick Vent	Brown	20	N/A

# easy-trim Ventilation

## 3-in-1 Eaves Vent Kit

Everything you need to provide 6m of eaves ventilation. Kit Contents:

- 6 x 300mm Rafter Rolls
- 12 x 500mm Over Fascia Vents
- 8 x 800mm Felt Support Trays

Our kits are also available with 400mm, 600mm & 800mm Rafter Rolls.

## Eaves Protection Strip

An alternative to our recycled PVC rigid eaves protection, Easy-Trim Protect is a high quality bitumen based eaves support strip that prevents roof underlay drape into the gutter. Available in:

- 330mm x 16m
- 500mm x 16m



## Circular Soffit Vents

To be fitted before or after the installation of soffit boards. Ventilates and protects against insects.

- Easy to install with a simple push-fit into fixing holes
- Suitable for use in both new or existing soffits
- Slot spacing designed to prevent ingress of large insects
- Complies with relevant building regulations and British Standards
- Supplied in a branded box with a perforated section ideal for Point of Sale
- Available in 5 colours to match all Soffits

## Continuous Rafter Tray

Allows a constant flow of air into the loft space preventing insulation blockage at the eaves and allowing moisture to escape.

6m lengths available in:

- 300mm
- 400mm
- 600mm
- 800mm

## Eaves Comb

A physical barrier that prevents birds, bats and insects entering the roof void between felt and tiles, causing nesting and infestation problems.

## Felt Support Trays including 2-in-1 Felt Support Trays & 3-in-1 Felt Support Trays



## Felt Support Trays

A high quality recycled PVC support tray that ensures any roof underlay does not drape into the gutter, preventing water ponding behind fascias and rotting of roof underlay, thus reducing maintenance levels.

## 2-in-1 Felt Support Trays

Felt support trays with the addition of integral over fascia vents to promote air circulation.

## 3-in-1 Felt Support Trays

Our 3-in-1 tray incorporates an over fascia vent and the further addition of a bird comb strip to combat bird and insect infestation.

## Over Fascia Vents

Our uniquely designed over fascia vents incorporate Slide Lock Technology to enable rapid installation with secure continual ventilation.

- Each 500mm piece has a male and female end which interlock to create a 1m length
- Robust structure will not crush or warp
- Smooth leading edge for discreet fitting
- 10mm available for cold roof construction
- 25mm for warm roofs, flat roofs and pitches of 15° and below



Our Over Fascia vents feature SlideLock Technology which enables rapid installation with secure continual ventilation

## Tile & Slate Vents

Our range of tile vents alleviate the accumulation of condensation in loft spaces and are compatible with most UK manufactured tiles. Suitable for all high and low ventilation and as an outlet terminal for extraction fans and soil pipe ventilation.

### Tile & Slate Vents

Available in Pinseal (smooth) or Riven (texture slate like appearance) finish with a virtually flat 10k ventilation area to significantly reduce the risk of ventilation blockage. Suitable for pitches of 22.50 and above.

### Plain Tile Vents

An injection moulded ventilator which offers precision and strength. Suitable for all plain clay tiles to BS402 part 1 and roof pitches of 300 and above.

### Universal Cowl Tile Vents

Moulded High Impact Polystyrene with UV stable paint to suit most colours. An unobtrusive design suitable for use with most manufacturers profiles, and has a patented 'anti-splash' sleeve device incorporating a 4mm fly-screen protection.

Product Code	Product Description	Colour	Size	Box Quantity	Pallet Quantity
ETE/3IN1VENTPAK	3-in-1 Eaves Vent Kit	N/A	N/A	N/A	50
ETEP/5U/330	Eaves Protection Strip 5U Felt	N/A	330mm x 16m	90*	N/A
ETEP/5U/500	Eaves Protection Strip 5U Felt	N/A	500mm x 16m	60*	N/A
ETE/CSV/BLACK	Circular Soffit Vent	Black	N/A	50	N/A
ETE/CSV/BROWN	Circular Soffit Vent	Brown	N/A	50	N/A
ETE/CSV/GREY	Circular Soffit Vent	Grey	N/A	50	N/A
ETE/CSV/TAN	Circular Soffit Vent	Tan	N/A	50	N/A
ETE/CSV/WHITE	Circular Soffit Vent	White	N/A	50	N/A
RAFT300	Continuous Rafter Tray	N/A	6m x 300mm	10	360
RAFT400	Continuous Rafter Tray	N/A	6m x 400mm	10	300
RAFT600	Continuous Rafter Tray	N/A	6m x 600mm	10	180
RAFT800	Continuous Rafter Tray	N/A	6m x 800mm	10	140
COMBFILLER	Eaves Comb	Black	1000mm	300	6000
COMBFILLER/50	Eaves Comb	Black	1000mm	50	N/A
EASYTRAY1.5	Eaves Support Tray	Black	1.5m	N/A	1000
2IN1FST	2-in-1 Felt Support Tray	N/A	1m	40	480
3IN1FST	3-in-1 Felt Support Tray	N/A	1m	20	240
ETE/OFV/10	Over Fascia Vent	Black	10mm	60	1440
ETE/OFV/25	Over Fascia Vent	Black	25mm	50	1200

Product Code	Product Description	Colour	Size
ETE/SVP/600300	LOWLINE SLATE VENT	PINSEAL (SMOOTH)	600MM X 300MM
ETE/SVR/600300	LOWLINE SLATE VENT	RIVEN (TEXTURE SLATE APPEARANCE)	600MM X 300MM
PTV/RED	INLINE PLAIN TILE VENT	TERRACOTTA	N/A
ETE/U/GRY	UNIVERSAL COWL TILE VENT	GREY	N/A
ETE/G/G	INTERLOCKING TILE LOWLINE VENT	GREY	N/A

All our tile vents are produced to order and are therefore subject to a lead time, available on request.

Product Code	Product Description	Size	Pack Quantity	Box Quantity
ETE/FH/112	FLEXIHOSE AND CLIPS	112MM	SINGLES	50
ETE/FP/110	MOULDED FLEXIPIPE	110MM/110MM	SINGLES	25
ETE/FP/75	MOULDED FLEXIPIPE	110MM/75MM	SINGLES	25
ETE/STR/110	SQUARE TO ROUND PIPE ADAPTOR	110MM	SINGLES	N/A
ETE/RTR/110	RECTANGLE TO ROUND PIPE ADAPTOR	110MM	SINGLES	N/A



# easy-trim Lead R

A sheet aluminium alternative to traditional lead with a protective anti-corrosion coating and a high performance butyl adhesive underside. Zero resale value, eliminating theft and vandalism - a common issue with traditional lead roofing products.

- Malleable, durable, waterproof and lightweight.
- No special tools required - simply cut with a knife or scissors.
- 20 years+ life expectancy.
- Requires no additional adhesive or tape.
- High performance adhesive for a permanent bond.
- Resistant against corrosion and UV degradation.
- Textured or smooth finish.

## Typical Applications:

- Abutments
- Chimneys
- Dormers

## Technical Data

- Surface finish: Corrugated or smooth
- Temperature resistance: -40°C / +90°C
- Minimum working temp: +5°C
- Life expectancy: Minimum 20 yrs+
- Resistant against corrosion & UV degradation

## Accessories

### Lead Flashing Fixing Clips

The Easy-Trim Fixing Clip grips lead firmly in place in seconds so it can be dressed more easily before being pointed in.

- Suitable for joints of 6mm - 18mm
- 50 clips per pack

### Lead Sealant

A high quality roofing and flashing sealant that prevents weather ingress, tile lift and noise. This fast skinning sealant is suitable for use with conservatories, industrial and domestic systems, air conditioning units and ducting. It is the only approved sealant for our Lead R system.

### Patination Oil

A protective coating for new lead which imparts an evenness of colour while its normal patina is being formed. To be applied on day of lead installation.

### Grab Plus

Grab Plus is the ultimate strength adhesive and sealant suitable for use indoor and out, in all weather conditions. Superior bonding power even on wet surfaces. Rapid curing, fully elastic and can be painted over once dry. Colours available: White & Black.our Lead R system.

### Slate Repair Hooks

A permanent but hidden, slate fixing and revolutionary roof slate repair tool.

## Lead R Textured Finish

Our textured pattern provides excellent malleability and formability whilst maintaining long term durability and performance.

5m rolls available in widths:

- 150mm
- 300mm
- 450mm
- 600mm

## Lead R Smooth Finish

Our high performance, smooth lead replacement. A high quality self adhesive alternative to traditional lead that can be used in both flat and pitched roof applications.

5m rolls available in widths:

- 150mm
- 300mm
- 450mm
- 600mm



Product Code	Description	Finish	Size	Box Quantity	Pallet Quantity
EASYLEADR1505	LEAD R - LEAD REPLACEMENT	TEXTURED	150MM X 5M	SINGLES	192
EASYLEADR3005	LEAD R - LEAD REPLACEMENT	TEXTURED	300MM X 5M	SINGLES	96
EASYLEADR4505	LEAD R - LEAD REPLACEMENT	TEXTURED	450MM X 5M	SINGLES	72
EASYLEADR6005	LEAD R - LEAD REPLACEMENT	TEXTURED	600MM X 5M	SINGLES	48
EASYLEADR1505SMT	LEAD R - LEAD REPLACEMENT	SMOOTH	150MM X 5M	SINGLES	192
EASYLEADR3005SMT	LEAD R - LEAD REPLACEMENT	SMOOTH	300MM X 5M	SINGLES	96
EASYLEADR4505SMT	LEAD R - LEAD REPLACEMENT	SMOOTH	450MM X 5M	SINGLES	72
EASYLEADR6005SMT	LEAD R - LEAD REPLACEMENT	SMOOTH	600MM X 5M	SINGLES	48

Product Code	Description	Colour	Size	Box Quantity	Pallet Quantity
HALLCLIP	LEAD FLASHING FIXING CLIPS	N/A	N/A	10	N/A
EASYLEADS	LEAD SEALANT	GREY	310ML	25	N/A
ETES/PATOIL/1LTRP	ATINATION OIL	N/A	1 LITRE	10	N/A
ETES/EASYGRAB+/BG	RAB PLUS	BLACK	310ML	12	N/A
ETES/EASYGRAB+/WG	RAB PLUS	WHITE	310ML	12	N/A
HALLHOOK	SLATE REPAIR HOOKS	N/A5	10 PER PACK	0	N/A

# easy-trim WeatherProofing



## Fiba-Pol

Fiba-Pol is a liquid roof repair coating that is moisture tolerant, cold applied, and reinforced with glass fibres. An effective and economical repair and waterproofing solution for damaged or leaking roofs and gutters. Fiba-Pol provides instant repairs and waterproofing for a wide range of applications in exposed conditions. The product is impervious to water and will provide an effective barrier to the transmission of liquid water and water vapour, until such time full systems or longer term solutions can be implemented. Available in black, grey and white.



## Bitumen Paint

Easy-Trim Bitumen Paint is a fast drying, solvent based, full bodied bituminous paint to comply with British Standard 3416 : Type I and Type II. It provides an effective waterproof, weatherproof, corrosion resistant protective coating. It is resistant to low concentrations of alkalis and acids and can withstand prolonged oxidation. It is suitable for application to a wide variety of materials including iron and steel, lead, zinc, aluminium, asbestos-cement, concrete, stone and brick.



## Bitumen Primer

A cold applied solvent based bituminous solution designed to penetrate and seal porous surfaces prior to the application of covering materials. Conforms to BS Code of Practice 144, Part 3. Bitumen Primer seals porous substrates and encourages the adhesion of bituminous waterproofing systems and sheet coverings. It may be applied successfully to a wide range of surfaces including concrete, asbestos cement, slate, metals (mild steel, zinc, lead) and lightweight concrete screeds.



## Felt Adhesive

Easy-Trim Felt Adhesive is a solvent based, high viscosity, bituminous adhesive with strong initial "grab" properties. It is a cold applied roofing adhesive formulated for convenience and safety, ensuring affinity and a strong, final bond to roofing felts. It is used for:

- Bonding all types of roofing felts to metal, timber and concrete
- Sealing roofing felt laps
- Bonding chippings to flat roofs



## Solar Reflective Paint

Easy-Trim Solar Reflective Paint is a solvent based bituminous coating, containing high quality leafing grade aluminium flake. It provides an excellent highly reflective bright silver coloured finish when dry, providing an effective waterproof and weatherproof protective coating, particularly where exposed bituminous, steel and corrugated iron surfaces are encountered.



## All Weather Compound

Easy-Trim All Weather Compound is a heavy duty, solvent based bituminous roof coating, compounded with fillers and fibres. It is of a brushable consistency. It is an effective, general purpose roof coating. It is almost instantly rain resistant after application and is therefore particularly suited to winter use. Applied by brush or spray to waterproof and reseal many different types of roof covering, including asphalt roofs, concrete roof decks, slates & tiles, built-up felt roofs, asbestos cement sheeting and metal sheeting (including iron, steel, zinc & lead).



Product Code	Product Description	Size	Colour	Box QuantityP	allet Quantity
ETEP/FIBA/5KG/G	FIBA-POL	5KG4	GREY		144
ETEP/FIBA/5KG/B	FIBA-POL5	KG	BLACK	41	44
ETEP/FIBA/5KG/W	FIBA-POL5	KG	WHITE	41	44
ETEP/FIBA/20KG/G	FIBA-POL2	0KGN	GREY	/A	24
ETEP/FIBA/20KG/B	FIBA-POL2	0KGN	BLACK	/A	24
ETEP/FIBA/20KG/W	FIBA-POL2	0KGN	WHITE	/A	24
ETEP/BP/5	BITUMEN PAINT5	LITRE	BLACK (WHEN DRY)	41	44
ETEP/BP/25	BITUMEN PAINT2	5 LITREN	BLACK (WHEN DRY)	/A	24
ETEP/BPR/5	BITUMEN PRIMER5	LITRE	BLACK (WHEN DRY)	41	44
ETEP/BPR/25	BITUMEN PRIMER2	5 LITREN	BLACK (WHEN DRY)	/A	24
ETEP/FA/5	FELT ADHESIVE	5 LITRE4	BLACK		144
ETEP/FA/25F	ELT ADHESIVE	25 LITRE	BLACK	N/A2	4
ETEP/SR/5	SOLAR REFLECTIVE PAINT5	LITRE	SILVER (WHEN DRY)	41	44
ETEP/SR/25	SOLAR REFLECTIVE PAINT2	5 LITREN	SILVER (WHEN DRY)	/A	24
ETEP/AW/5	ALL WEATHER COMPOUND5	LITRE	BLACK	41	44
ETEP/AW/25A	LL WEATHER COMPOUND2	5 LITREN	BLACK	/A	24

**APP Torch-On Membranes**

Maxi Torch APP Cap Sheets encompass the standard range having a glass fibre carrier and the APP Premium range having a high quality polyester carrier. APP Cap Sheets are more forgiving under foot.

**Maxi-Torch APP Premium Mineral**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

**Maxi-Torch APP Mineral**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

**Maxi-Torch APP 4kg Universal Sanded Underlay/Capsheet**

Can be applied as upper layer in multi-ply systems. Can be applied single-ply in certain systems. To be applied under heavy protection. Application using hot pour oxidate asphalt bonding and/or torch-on.

**Maxi-Torch Unilay Sanded Underlay**

Can be applied as upper layer in multi-ply system. Single ply application not recommended. To be applied under heavy protection. Application using torch-on.



**SBS Torch-On Membranes**

Manufactured from polymer bitumen modified with SBS polymers. Making SBS a more malleable layer preferred by professional roofers.

**Maxi-Torch SBS Premium Mineral**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

**Maxi-Torch SBS Mineral**

Can be applied as upper layer in multi-ply systems. Single-ply application not recommended. Self-protected membrane. Heavy topping not required. Application using torch-on.

**Maxi-Torch SBS Premilay Sanded Underlay**

Can be applied as upper layer in multi-ply system. Single ply application not recommended. To be applied under heavy protection. Application using torch-on.

**Maxi-Torch SBS 4.8kg Universal Sanded Underlay/Capsheet**

Can be applied as upper layer in multi-ply system. Can be applied single-ply in certain systems. To be applied under heavy protection. Application using hot pour oxidate asphalt bonding and/or torch-on.

**Maxi-Torch SBS Film/Film Underlay**

Should be applied as intermediate or underlayer in multi-ply systems. Single ply application not recommended. Apply under heavy protection. Application using torch-on.


**Maxi-Torch 3B Pour and Roll**

Maxi-Torch 3B is a waterproofing membrane, consisting of a glass fibre base coated with oxidised bitumen. It is sand finished on both surfaces. It is used as an economical underlay (or intermediate layer) in a built-up felt roofing specification, and usually fully bonded in hot bitumen.

Product Code	Description	Finish	Material Upper Finish	Underside Finish	Carrier	Dimensions	Weight	Pallet Quantity
MAXI/APP/BLK/PRE	APP PREMIUM MINERAL	BLACK	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	4KG	25
MAXI/APP/GRN/PRE	APP PREMIUM MINERAL	GREEN	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	4KG	25
MAXI/APP/GRNA	PP MINERAL	GREEN	MINERAL GRANULES	PE FILM	GLASS	1M X 8M	4KG	25
MAXI/APP/SANDED	APP UNIVERSAL SANDED	SAND	SAND	PE FILM	POLYESTER	1M X 8M	4KG	30
MAXI/APP/UNILAY	APP UNILAY SANDED	SAND	SAND	PE FILM	POLYESTER	1M X 16M	4KG	25

Product Code	Description	Finish	Weight	Length	WidthP	allet Qty
ETMT/3B/SAND3	B POUR & ROLL	SAND	40KG	20M	1M	25

Product Code	Description	Finish	Material Upper Finish	Underside Finish	Carrier	Dimensions	Weight	Pallet Quantity
MAXI/SBS/BLK/PRE	SBS PREMIUM MINERAL	BLACK	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	5KG	25
MAXI/SBS/GRN/PRE	SBS PREMIUM MINERAL	GREEN	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	5KG	25
MAXI/SBS/BLK	SBS MINERAL	BLACK	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	5KG	28
MAXI/SBS/GRN	SBS MINERAL	GREEN	MINERAL GRANULES	PE FILM	POLYESTER	1M X 8M	5KG	28
MAXI/SBS/PREMILAY	SBS PREMILAY SANDED	SAND	SAND	PE FILM	POLYESTER	1M X 16M	5KG	25
MAXI/SBS/SANDED	SBS UNIVERSAL SANDED	SAND	SAND	PE FILM	POLYESTER	1M X 8M	4.8KG	25
MAXI/SBS/FILM	SBS FILM/FILM UNDERLAY	PE FILM	PE FILM	PE FILM	POLYESTER	1M X 13M	5KG	25

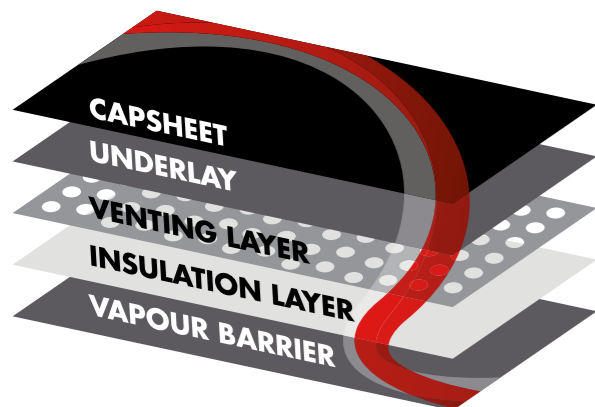

**12 Year Guarantee on APP Systems**

Capsheet: Maxi-Torch APP Premium Mineral Underlay: Maxi-Torch APP 4kg Universal Underlay or Maxi-Torch APP Unilay Sanded Underlay Venting Layer: D2000 Vent Insulating Layer\*: Not provided by Easy-Trim Vapour Barrier\*: D2000 Vapour MLVB

**15 Year Guarantee on SBS Systems**

Capsheet: Maxi-Torch SBS Premium Mineral Underlay: Maxi-Torch SBS Film/Film Underlay or Maxi-Torch SBS Premilay Sanded Underlay Venting Layer: D2000 Vent Insulating Layer\*: Not provided by Easy-Trim Vapour Barrier\*: D2000 Vapour MLVB

# easy-trim® D-TORCH

D2000 and D3000 are our premium range of torch-on membranes. Their premium materials and grade allow simple installation with lower heat, and command extended guarantees over our Maxi-Torch range.

## easy-trim® D3000

### D3000 SBS E-Flex Mineral

An SBS polymer modified bituminous membrane with non-woven polyester core for excellent flexibility, strength and puncture resistance.

### D3000 SBS Underlay

A sand surfaced SBS polymer modified bituminous underlay with non-woven polyester core and PE film backing.

## easy-trim® D2000

### D2000 SBS Mineral

An SBS polymer modified bituminous membrane manufactured with a mineral upper surface and a PE film backing.

### D2000 SBS Film/Film Underlay

A sand surfaced PE backed SBS polymer modified bituminous underlay with non-woven polyester core giving it good flexibility, strength and puncture resistance.

### D2000 APP Unitec

A sand surfaced, PE film backed APP polymer modified bituminous underlay.

### D2000 Vapour MLVB

A polymer modified vapour control layer with an aluminium core, manufactured with a thermofusible PE film back. The top sand surface achieves a unique bond strength with PU adhesives or recommended bituminous bonding compounds with bonding insulation.


### D2000 Vent

An oxidised bituminous membrane with 25mm perforations and strong glass fibre core. Designed for use as a preparation layer to achieve a partial bond in built up roofing systems.



Product Code	Description	Finish	Material Upper Finish	Underside Finish	Dimensions	Pallet Quantity
D2000/SBS/GRND	2000 SBS MINERAL	GREEN	MINERAL	PE FILM	1M X 8M	25
D2000/SBS/BRI	D2000 SBS MINERAL	BRINDLE	MINERAL GRANULES	PE FILM	1M X 8M	25
D2000/SBS/BLKD	2000 SBS MINERAL	BLACK	MINERAL GRANULES	PE FILM	1M X 8M	25
D2000/SBS/FILM	D2000 SBS FILM/FILM UNDERLAY	PE FILM	PE FILM	PE FILM	1M X 8M	28
D2000/APP/UNITEC	D2000 APP UNITEC	SAND	SAND	PE FILM	1M X 16M	28
D2000/SBS/MLVB	D2000 VAPOUR MLVB FILM	SAND	SAND	PE FILM	1M X 10M	33
D2000/APP/VENTD	2000 VENT	BLACK	PE FILM	PE FILM	1M X 30M	25

Product Code	Description	Finish	Material Upper Finish	Underside Finish	Dimensions	Pallet Quantity
D3000/SBS/BLK	D3000 SBS E-FLEX	BLACK	MINERAL GRANULES	PE FILM	1M X 6M	25
D3000/SBS/GRN	D3000 SBS E-FLEX	GREEN	MINERAL GRANULES	PE FILM	1M X 6M	25
D3000/SBS/SAND	D3000 SBS UNDERLAY	SAND	SAND	PE FILM	1M X 12M	23

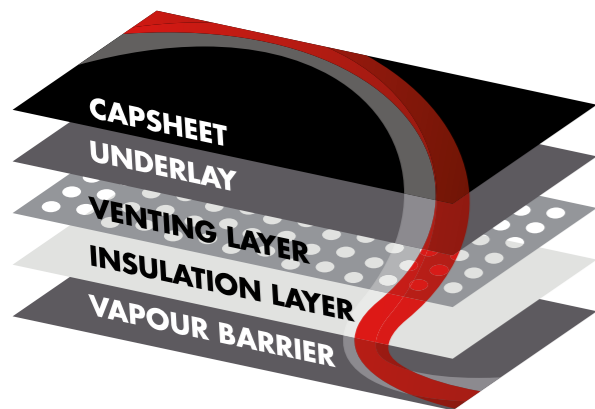


### 18 Year Guarantee on D2000 Systems

Capsheet: D2000 SBS Mineral  
Underlay: D2000 SBS Film/Film Underlay or S2000 SBS Sanded Underlay  
Venting Layer: D2000 Vent  
Insulating Layer\*: Not provided by Easy-Trim  
Vapour Barrier\*: D2000 Vapour MLVB

### 20 Year Guarantee on D3000 Systems


Capsheet: D3000 E-Flex SBS Mineral  
Underlay: D3000 SBS Underlay  
Venting Layer: D2000 Vent  
Insulating Layer\*: Not provided by Easy-Trim  
Vapour Barrier\*: D2000 Vapour MLVB




CONCRETE



ASPHALT



EXISTING MEMBRANE



PLYWOOD



CORRUGATED METAL



**JUTA UK**

Melton Grove Works  
Church Road  
Lytham St Annes  
Lancashire  
FY8 5PL

[info@juta.co.uk](mailto:info@juta.co.uk)  
01772 754177  
[juta.co.uk](http://juta.co.uk)

**Easy-Trim**

Unit 12b Altham  
Industrial estate,  
Metcalf Dr, Altham  
Lancashire  
BB5 5TU

[sales@easy-trim.co.uk](mailto:sales@easy-trim.co.uk)  
01282 930680  
[easy-trim.co.uk](http://easy-trim.co.uk)