




GP® TITANBOND®

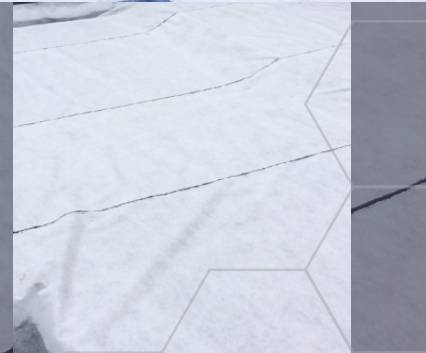

GP® TITANBOND® is a pre-applied fully bonded waterproofing membrane incorporating the GP® TITANFLEX® membrane and a heavy duty virgin polypropylene geotextile. The geotextile is laminated to the membrane to provide a dual function; protecting the membrane from damage and providing an integrated 'bond' to poured concrete, ensuring a fully bonded waterproofing barrier which has exceptionally high resistance to ground gases and VOCs. GP® TITANBOND® is used for the gas/waterproofing/tanking of underground structure where harmful ground gases are anticipated.

Thickness	2.0 mm
Width	1.9 m
Length	25 m
Weight	650 g/m ²

TITANTECH®

For developers of brownfield and contaminated sites the TITANTECH® family of products represent a major step forward in safeguarding projects against gaseous and chemical contamination.

Handling

Roll weights can be in excess of 20kg and hence appropriate care and equipment is required for unloading and handling.

Storage

Rolls of GP® TITANBOND® should be stored on stable/level ground and stacked not more than five rolls high, with no other material stacked on top. The rolls can be stored outdoors when packaged, but should be protected from exposure to UV.

Certifications



Please Scan



Rev 2024



Feature	Characteristics	Test Method	GP® TITANBOND®
Physical Properties	Thickness	EN 1849-2	2.0 mm
	Width	EN 1849-2	1.9 m
	Length	EN 1849-2	25 m
	Weight	EN 1849-2	650 g/m ²
Hydraulic Press	Water Vapour Transmission Rate	EN 1931	0.11 - 0.18 g/m ² /day
	Water Tightness (60 kPa)	EN 1928	Pass
	Water Tightness (196 kPa - 20 m Water Head) (Basement Application)	EN 1928	Pass
Mechanical Properties	Resistance to Static Load	EN 12730-B	≥ 20 kg
	Puncture Resistance	EN 12236	≥ 2.0 kN
	Tensile Strength (MD)	EN 12311-1	> 550 N/50mm
	Tensile Strength (CMD)	EN 12311-1	> 400 N/50mm
	Tensile Elongation (MD/CMD)	EN 12310-1	> 550 %
	Tear Resistance (MD/CMD)	EN 12310-1	> 300 N
	Resistance to Impact	EN 12691-B	> 1650 mm
	Reaction to Fire	EN 13501-1	E Class
	Concrete Peel Adhesion	ASTM D903 (MOD)	> 3.0 kN/m
	Resistance to Artificial Ageing	EN 1296/EN 1928	Pass
Resistance to Chemicals	EN 1296/EN 1928	Pass	
Compliance and Certification	CE Mark - EN13967:2012		
	NHBC Standards Compliant		
	BS 8485:2015 Compliant (Methane and Carbon Dioxide barrier)		
	CIRIA C748 Compliant (VOC Barrier)		
	BS 8102:2009 Compliant (Type A Waterproofing Barrier)		
Vapour Permeability 100% Concentration	Transmission Rate of Benzene	EN ISO 15105-2	< 3.6 mg/m ² /day
	Transmission Rate of Toluene	EN ISO 15105-2	< 13.8 mg/m ² /day
	Transmission Rate of Ethyl Benzene	EN ISO 15105-2	< 2.7 mg/m ² /day
	Transmission Rate of Xylenes (M,P,O)	EN ISO 15105-2	< 7.7 mg/m ² /day
	Transmission Rate of Hexane	EN ISO 15105-2	< 0.6 mg/m ² /day
	Transmission Rate of Vinyl Chloride	EN ISO 15105-2	< 0.05 mg/m ² /day
	Transmission Rate of Trichloroethene (TCE)	EN ISO 15105-2	< 54.7 mg/m ² /day
	Transmission Rate of Tetrachloroethene (PCE)	EN ISO 15105-2	< 26.2 mg/m ² /day
	Transmission Rate of Naphthalene	EN ISO 15105-2	< 0.0006 mg/m ² /day
	Transmission Rate of CIS-1,2-Dichloroethylene	EN ISO 15105-2	< 1.1 mg/m ² /day
Gas Permeability	Methane Permeability	EN ISO 15105-1	0.13 ml/m ² /day/atm
	Methane Permeability (Jointed)	EN ISO 15105-1	1.00 ml/m ² /day/atm
	Carbon Dioxide Permeability	EN ISO 15105-1	3.01 ml/m ² /day/atm
	Vinyl Chloride Gas Permeability	EN ISO 15105-1	0.04 ml/m ² /day/atm
	Radon Permeability	K124/02/95	1.0 x 10 ⁻¹² m ² /S
	Hydrogen Sulphide Permeability	EN ISO 15105-1	< 0.16 ml/m ² /day/atm



Feature	Characteristics	Test Method	GP® TITANBOND®
Durability and Chemical Resistance	Chemical Resistance - Sulfuric ACID (10% Solution of Sulfuric Acid (H ₂ SO ₄)) 50° For 56 Days	EN 14414-A	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Chemical Resistance - BASIC (Calcium Hydroxide Saturated Suspension) 50° For 56 Days	EN 14414-B	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Chemical Resistance - SOLVENTS (35% Diesel, 35% Paraffin, 30% Oil Hd30 (Vol)) 50° For 56 Days	EN 14414-C	TENSILE STRENGTH RETAINED >80% RESULT - PASS
	Chemical Resistance - SYNTHETIC LEACHATE (Mixture of 14 Acids, Chlorides, Sulphates & Phosphates) 50° For 56 Days	EN 14414-D	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Resistance to Leaching - HOT WATER (Deionised Water) 50° For 56 Days	EN 14415-A	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Resistance to leaching - AQUEOUS ALKALINE (Saturated Calcium Hydroxide) 50° For 56 Days	EN 14415-B	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Resistance to Leaching - ORGANIC ALCOHOL (30% Methanol, 30% Isopropanol, 40% Glycol) 50° For 56 Days	EN 14415-C	TENSILE STRENGTH RETAINED 100% RESULT - PASS
	Chemical Resistance - BENZENE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 95% (MD), 102% (CMD) RESULT - PASS
	Chemical Resistance - TOLUENE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 94% (MD), 91% (CMD) RESULT - PASS
	Chemical Resistance - ETHYL BENZENE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 99% (MD), 97% (CMD) RESULT - PASS
	Chemical Resistance - XYLENES - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 91% (MD), 106% (CMD) RESULT - PASS
	Chemical Resistance - TCE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 99% (MD), 93% (CMD) RESULT - PASS
	Chemical Resistance - PCE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 93% (MD), 93% (CMD) RESULT - PASS
	Chemical Resistance - NAPHTHALENE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 101% (MD), 93% (CMD) RESULT - PASS
	Chemical Resistance - HEXANE - 100% Saturated Concentration	EN 14414-D (MOD)	TENSILE STRENGTH RETAINED 99% (MD), 104% (CMD) RESULT - PASS



JUTA UK

Please contact JUTA
UK Directly for more
information on
GP® TITANBOND®

Installation

GP® TITANBOND® should be installed in accordance with the product installation guidelines, and in accordance with best practice.

Jointing and Sealing

GP® TITANBOND® can be heat welded or taped, with jointing carried out by competent personnel with suitable qualifications in accordance with best practice. GP® TITANBOND® should be overlapped by at least 100mm. If taping joints, only suitable tape must be used, ensuring application with a silicone roller to remove trapped air. JUTA pre-formed details, or self adhesive gas membrane are available for sealing around protuberances.

Accessory Products

- GP® DPC
- GP® TITAN TAPE
- GP® TITAN OVERTAPE
- JUTA 300TT